
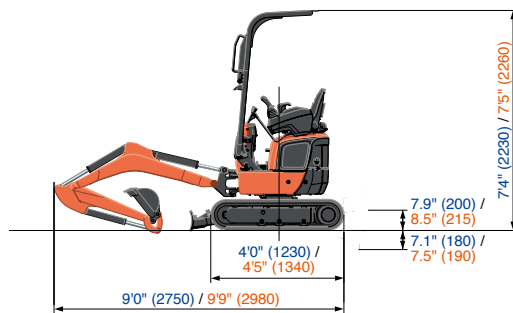


Specifications

Model				K008-5		U10-5	
Type of ROPS / FOPS				Canopy			
Type of tracks				Rubber			
Engine	Model			D722-E4-BH-4US		D722-E4-BH-5US	
	Output (SAE J1995 gross)		HP (kW) @ rpm	10.3 (7.7) @ 2050			
	Output (SAE J1349 net)		HP (kW) @ rpm	10.1 (7.5) @ 2050			
	Displacement		cu. in. (cc)	43.8 (719)			
Dimensions	Overall length		ft. in. (mm)	9'0" (2750)		9'9" (2980)	
	Overall height		ft. in. (mm)	7'4" (2230)		7'5" (2260)	
	Overall width	Standard	ft. in. (mm)	2'10" (860)		3'3" (990)	
		Narrow	ft. in. (mm)	2'7" (800)		2'6" (750)	
	Track gauge	Standard	ft. in. (mm)	2'10" (860)		3'3" (990)	
		Narrow	ft. in. (mm)	2'4" (700)		2'6" (750)	
	Min. ground clearance		in. (mm)	5.9" (150)		5.5" (140)	
Hydraulic system	Pump capacity		GPM (ℓ/min)	2.8 (10.5) × 2		2.8 (10.5) × 2 / 0.8 (3.1) × 1	
	Auxiliary hydraulic flow		GPM (ℓ/min)	5.5 (21)			
	Max. breakout force	Bucket / Arm	lbs. (kgf)	2205 (1000) / 1012 (458.9)		2337 (1060) / 1214 (550.6)	
Drive system	Travel speed	Low / High	mph (km/h)	1.2 / 2.5 (2.0 / 4.0)			
	Tumbler distance		ft. in. (mm)	2'11" (900)		3'4" (1010)	
	Crawler length		ft. in. (mm)	4'0" (1230)		4'5" (1340)	
	Shoe width		in. (mm)	7.1" (180)			
	Ground contact pressure		psi (kgf/cm ²)	4.1 (0.29)		4.2 (0.30)	
Swing system	Unit swing speed		rpm	8.3			
	Boom swing angle	Left / Right	degree	55 / 55			
Blade	Dimensions	Width Std / Narrow	ft. in. (mm)	2'10" (860) / 2'4" (700)		3'3" (990) / 2'6" (750)	
		Height	in. (mm)	7.9" (200)			
	Max. lift above ground		in. (mm)	7.9" (200)		8.5" (215)	
	Max. drop below ground		in. (mm)	7.1" (180)		7.5" (190)	
Hydraulic oil (Reservoir / System)			gal (ℓ)	3.6 / 4.8 (13.5 / 18)		3.3 / 4.5 (12.6 / 17.1)	
Fuel reservoir			gal (ℓ)	3.2 (12)			
Operating weight (Including operator's weight @ 165 lbs.)			lbs. (kgf)	2315 (1050)		2646 (1200)	

Dimensions

K008-5 / U10-5



Unit: ft. in. (mm)

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

Kubota

KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: www.kubotausa.com

©2022 Kubota Corporation



Kubota
Genuine Parts
for maximum
performance,
durability and
safety

