


## Specifications

Model		SVL110-3		
Type of operator station		Closed CAB		
Engine	Model	V3800-TIE5-LA		
	Output (SAE J1995 gross)	HP (kW)/rpm	112.7(84.0) / 2500	
	Output (SAE J1349 net)	HP (kW)/rpm	101.3(75.6) / 2500	
	Displacement	cu.in. (cc)	230.0 (3769)	
	Cylinders		4	
	Bore × Stroke	in. (mm)	3.9 (100) × 4.7 (120)	
Loader performance	Aspiration	Turbocharged		
	Rated operating capacity-35% tipping load	lbs. (kg)	3700 (1678)	
	Rated operating capacity-50% tipping load	lbs. (kg)	5286 (2398)	
	Tipping Load	lbs. (kg)	10571 (4795)	
	Breakout force	Bucket	lbf. (kgf)	7650 (3469)
		Lift arm	lbf. (kgf)	5288 (2398)
Undercarriage	Lift arm path	Vertical		
	Track width	Standard in. (mm)	17.7 (450)	
	Ground pressure	Standard psi	4.8	
	Track rollers (per side)		5	
	Track ground contact length	in. (mm)	65.6 (1667)	
	Travel speed	Low	mph (km/h)	5.5 (8.8)
High		mph (km/h)	8.4 (13.4)	
Hydraulic system	Traction force	lbf. (kgf)	13174.7 (5976)	
	Aux. hydraulic flow	gpm (ℓ/min.)	45.0 (170.4)	
	Aux. hydraulic pressure	psi (kgf/cm <sup>2</sup> )	3553 (250)	
Service refill capacities	Hydraulic system	gal. (ℓ)	18.5 (70.1)	
	Hydraulic tank	gal. (ℓ)	10.6 (40.2)	
	Fuel tank	gal. (ℓ)	30.6 (115.7)	
	DEF tank	gal. (ℓ)	3.4 (12.7)	
Operating weight (Includes operator weight 165 lbs.)		lbs. (kg)	12322 (5589)	

## Dimensions

A	Length of track on ground	in. (mm)	65.6 (1667)
B	Track gauge	in. (mm)	59.5 (1512)
C	Length w/o bucket	in. (mm)	123.7 (3141)
D	Length w/bucket on ground	in. (mm)	153.6 (3901)
E	Height to top of cab	in. (mm)	83.1 (2112)
F	Bucket hinge pin height at max. lift	in. (mm)	126.5 (3264)
G	Rollback angle at carry position	degree	28
H	Reach at max. lift and dump	in. (mm)	40.7 (1034)
I	Ground clearance	in. (mm)	10.9 (278)
J	Departure angle	degree	30.9
K	Max. dump angle	degree	43
L	Vehicle width standard track	in. (mm)	77.2 (1962)
M	Width with bucket	in. (mm)	81 (2057)
N	Turning radius from center-machine rear	in. (mm)	63.7 (1618)

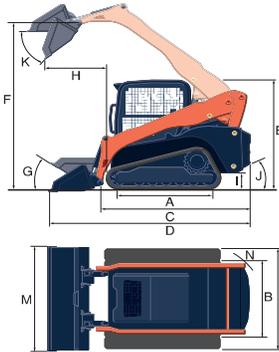

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/kW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

Copyright © 2025 Kubota Tractor Corporation. All rights reserved.

# Kubota

**KUBOTA TRACTOR CORPORATION**

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: [www.kubotausa.com](http://www.kubotausa.com)



**Kubota  
Genuine Parts**  
for excellent  
performance,  
durability and  
safety



Cat. No.9011A-01-US Printed in Japan '25-12D. 10



**For Earth, For Life**  
**Kubota**

# SVL

**KUBOTA COMPACT TRACK LOADER**  
**SVL110-3**

Kubota's first Compact Track Loader over 100 HP. Engineered for strength and versatility, this machine is designed to tackle demanding tasks with ease.

